







# EVO-SLIM EVO14-20

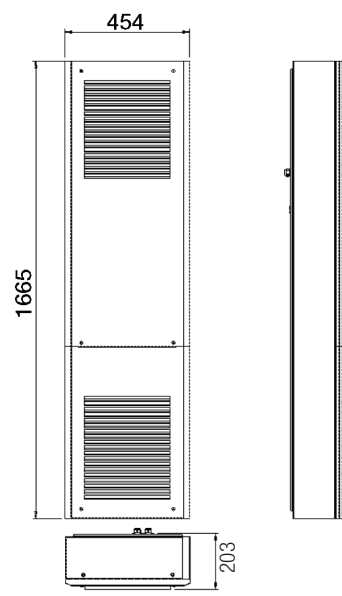

## Performance - Resa - Leistung - Rendimiento

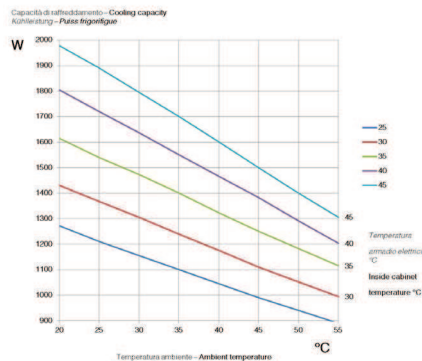

EVO SLIM 14

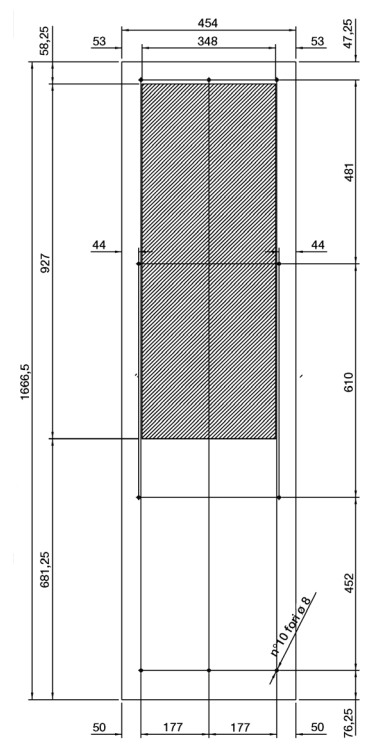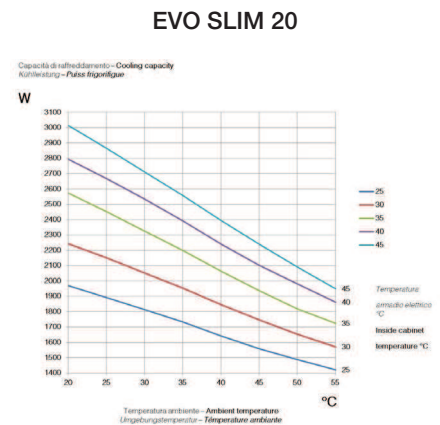

CODE - CODICE - MODEL - CODIGO	M.U.	EV014U12037000	EV014U12207000	EV020U12037000	EV020U12207000
Power supply - Alimentazione - Spannungsversorgung - Tensión	V / ph / Hz	115-1-60	230-1-60	115-1-60	230-1-60
Cooling capacity L35L35 - Potenza raffreddamento L35L35 Kälteleistung L35L35 - Potencia frigorífica L35L35 - DIN 3168	W	1500	1500	2200	2200
Cooling capacity L35L50 - Potenza raffreddamento L35L50 Kälteleistung L35L50 - Potencia frigorífica L35L50 - DIN 3168	W	1250	1250	1800	1800
Height / Widht / Depth - Altezza / Larghezza / Profondità Höhe / Breite / Tiefe - Altura / Ancho / Profundidad	mm	1665x454x203*	1665x454x203*	1665x454x203*	1665x454x203*
Max running current - corrente max, in marcia Max. Stromaufnahme - Corriente máxima, en marcha	A	10,4	5	14,4	8
Starting current - Corrente assorbita alla partenza Anlaufstrom - Corriente absorbida al arranque	A	44,5	21	59,5	25,5
Pre-Fuse T - Fusibile T - Absicherung T - Elemento previo de fusibile T	A	25	15	20	15
Power consumption L35L50 - Potenza assorbita L35L50 Leistungsaufnahme L35L50 - Potencia absorbida L35L50 - DIN3168	W	910	880	1480	1570
Side cabinet fan flow, free blowing - Portata aria ventil. lato armadio, bocca libera Luftmenge Schrankseite, freiblasend - Caudal aire ventil. Lado armario	m <sup>3</sup> /h	575	575	860	860
Regulation Temperature limits - Limiti di regolazione Temperatura Temperatur Einstellbereich - limites de ajuste de Temperatura	°C	25 / 45	25 / 45	25 / 45	25 / 45
Side ambient Temperature limits - Limiti di Temperatura lato ambiente Umgebungstemperatur - Limites Temperatura lado ambiente	°C	-40 / +55	-40 / +55	-40 / +55	-40 / +55
Side cabinet protection degree - Protezione lato armadio Schutzgrad Schrankseite - Protección lado armario	IP / Type	54 / 4	54 / 4	54 / 4	54 / 4
Noise level - Rumorosità - Geräuschpegel - Nivel de ruido	dB(A)	57	57	65	65
Weight - Peso - Gewicht - Peso	kg	50,5	50,5	54,5	54,5

**OPTIONAL**

Special colour - Colore speciale  
Stainless steel cover Inox AISI304 - Copertura Inox AISI304

OCAVNS03  
OCAVISL14

\*senza pressacavo - without cable gland

Unità 230 V UL può funzionare anche a 50 Hz  
230V UL unit can work with frequency 50 Hz

OUTDOOR AIR CONDITIONERS - CONDIZIONATORI OUTDOOR - OUTDOOR KLIMAGERÄTE - ACONDICIONADORES DE AIRE PARA APLICACIÓN EXTERNO  
**OUTDOOR - EVO SLIM**