
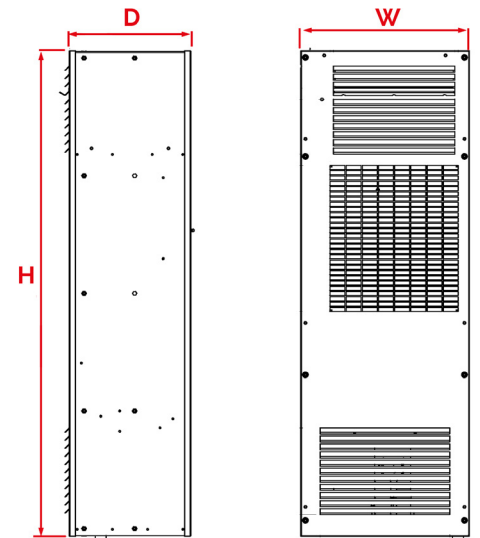


# Predator - PRT10H/F

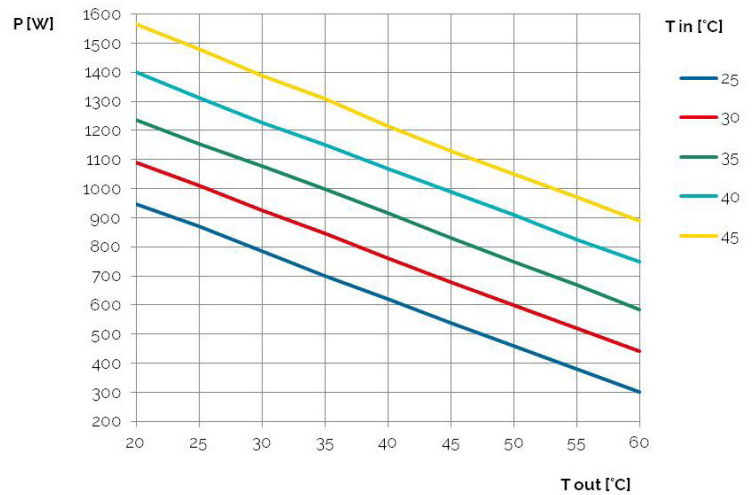

CODICE- CODE - ARTIKELNUMMER - CÓDIGO	M.U.	PRT10HA3201000	PRT10FA3201000	PRT10FD3121000
Potenza di raffreddamento - Cooling Capacity - Kälteleistung - Capacidad de refrigeración L35L50- DIN3168	W	1000	1000	500 - 1000
Potenza di raffreddamento - Cooling Capacity- Kälteleistung - Capacidad de refrigeración L35L50-DIN3168	W	750	750	250 - 750
Alimentazione - Power Supply - Spannungsversorgung - Alimentación eléctrica	V-ph-Hz	230-1-50/60 VAC + 48VDC	230-1-50/60	48VDC
Altezza/Larghezza/Profondità - Height/Width/Depth - Höhe/Breite/Tiefe - Altura/Ancho/Profundidad (HxWxD)	mm	1200x417x300	1200x417x300	1200x417x300
Potenza Assorbita - Power Consumption - Leistungsaufnahme - Potencia Absorbida @ 230VAC L35L50	W	600	600	--
Potenza Assorbita - Power Consumption - Leistungsaufnahme - Potencia Absorbida @ 48VDC L35L50	W	110	--	670
Corrente Assorbita-Absorbed Current-Stromaufnahme-Corriente Absorbida@230VAC 35L35	A	2,5	2,7	--
Corrente assorbita alla partenza - Starting Current - Anlaufstrom - Corriente de arranque @ 230VAC	A	16	16	--
Corrente Assorbita - Absorbed Current - Stromaufnahme - Corriente Absorbida @ 48VDC L35L35	A	2,6	--	12,4
Limiti Temperatura Interna - Cabinet Temperature Limits - Temperatur Einstellbereich - Limites de temperatura en el armario	°C	+25 / +45	+25 / +45	+25 / +45
Limiti Temperatura Esterna - Ambient Temperature Limits - Grenzwerte Umgebungstemperatur - Limites de temperatura ambiente	°C	-20 / +60	-20 / +60	-20 / +60
Protezione lato armadio - Cabinet Protection Degree - Schutzgrad Schrankseite - Clase de protección del armario	IP	54	54	54
Rumorosità - Noise Level - Geräuschpegel - Nivel de ruido	dB(A)	55	56	67,5
Peso - Weight - Gewicht - Peso	kg	59	59	57