




ECE ECE60



SPOT COOLER - SPOT COOLER - SPOT COOLER - SPOT COOLER - SPOT COOLER - ECE

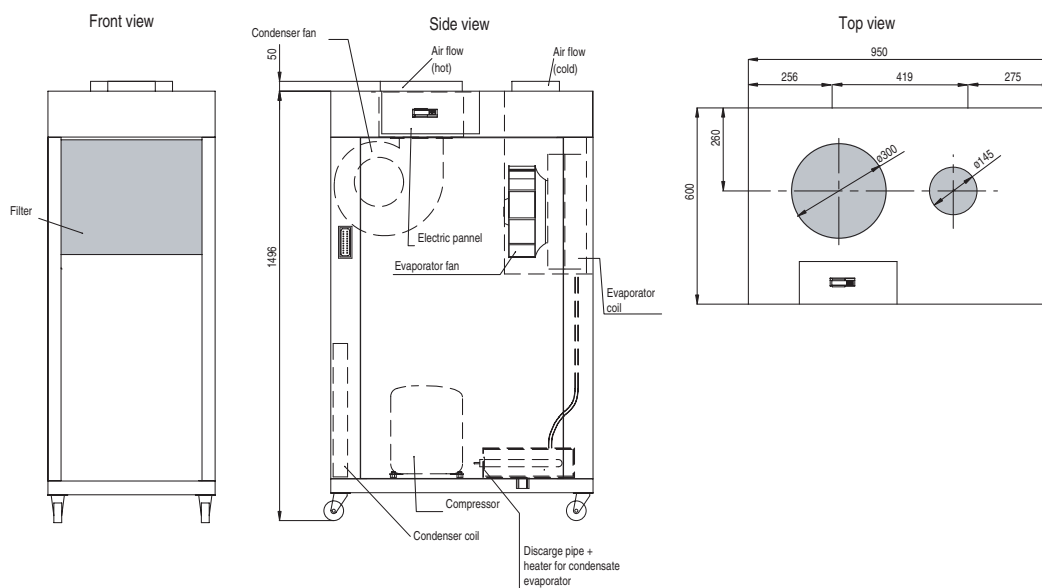

CODE - CODICE - MODEL - CODIGO	M.U.	ECE60002617000
Power supply - Alimentazione - Spannungsversorgung - Tension	V / ph / Hz	400-3-50 460-3-60
Cooling capacity L35L35 - Potenza raffreddamento L35L35 Kälteleistung L35L35 - Potenza frigorifica L35L35 - DIN 3168	W	6000
Height / Widht / Depth - Altezza / Larghezza / Profondità Höhe / Breite / Tiefe - Altura / Ancho / Profundidad	mm	1496x950x600
Max running current - corrente max, in marcia Max. Stromaufnahme - Corriente máxima, en marcha	A	6
Starting current - Corrente assorbita alla partenza Anlaufstrom - Corriente absorbida al arranque	A	35
Pre-Fuse T - Fusibile T - Absicherung T - Elemento previo de fusibile T	A	12
Power consumption L35L50 - Potenza assorbita L35L50 Leistungsaufnahme L35L50 - Potenza absorbida L35L50 - DIN3168	W	2601+2000
Side cabinet fan flow, free blowing - Portata aria ventil. lato armadio, bocca libera Luftmenge Schrankseite, freiblasend - Caudal aire ventil. Lado armario	m3/h	1800
Side ambient Temperature limits - Limiti di Temperatura lato ambiente Umgebungstemperatur - Limites Temperatura lado ambiente	°C	20 - 45
Noise level - Rumorosità - Geräuschpegel - Nivel de ruido	dB(A)	69
Weight - Peso - Gewicht - Peso	kg	150

OPTIONAL

Special Colour - Colore Speciale
Evaporator Conveyor - Convogliatore lato Evaporatore
Ducts - Tubazioni

OCAVNS03
ACAACE60CE
BRAGA45ECE