



CDI40

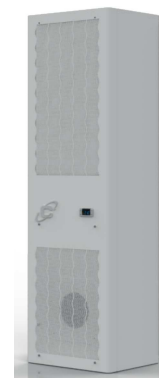

CODICE - CODE - ARTIKELNUMMER - CÒDIGO	M.U.	CDI40
UL Listed		•
Tensione nominale - Rated voltage - Nennspannung - Tensión nominal	V, ~	110÷240
Frequenza nominale - Nominal frequency - Nennfrequenz - Frecuencia nominal	Hz	50÷60
Potenza frigorifera-Cooling capacity-Kühlleistung-Potencia frigorifica	L35L35 W	4200
Potenza frigorifera - Cooling capacity - Kühlleistung - Potencia frigorifica	L35L50 W	3350
Potenza assorbita - Power consumption - Leistungsaufnahme - Potencia absorbida	L35L35 W	1080
Potenza assorbita - Power consumption - Leistungsaufnahme - Potencia absorbida	L35L50 W	1315
EER	L35L35	3,9
	L35L50	2,5
Temp. interne di funzionamento - Internal operating temp. - Interne Betriebstemperatur - Temp. internas de funcionamiento	min/ max °C	+20 / +45
Temp. esterne di funzionamento - External operating temp - Externe Betriebstemperatur - Temp. externas de funcionamiento	min/ max °C	+10 / +60
Grado di protezione circuito interno - Internal circuit protection rating - Schutzgrad interner Kreislauf - Grado de protección del circuito interno	CE IP	54
	UL Type	12
Pressione sonora esterna - External sound pressure - Externer Schalldruck - Presión sonora externa	dB(A)	66
Altezza / Larghezza / Profondità - Height / Width / Depth - Höhe / Breite / Tiefe - Altura / Anchura / Profundidad	mm	1666 x 496 x 393
Peso - Weight - Gewicht - Peso	kg	101-90

- A = Flush Mounting
- B = Semi- Flush Mounting
- C = External Mounting

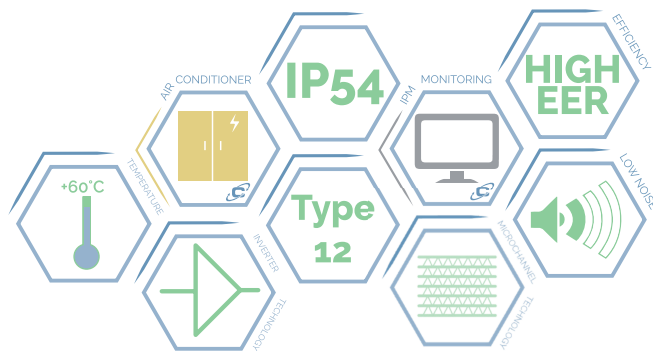