





# EVO-SLIM EVO05-10

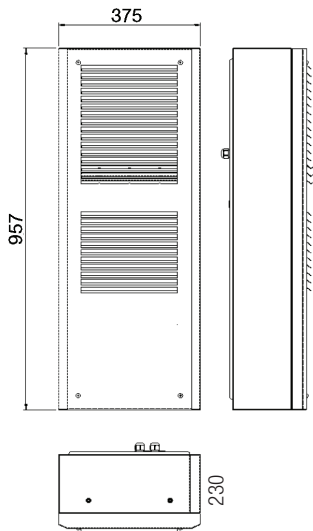


Capacità di raffreddamento - Cooling capacity  
Kälteleistung - Puisse frigorifique

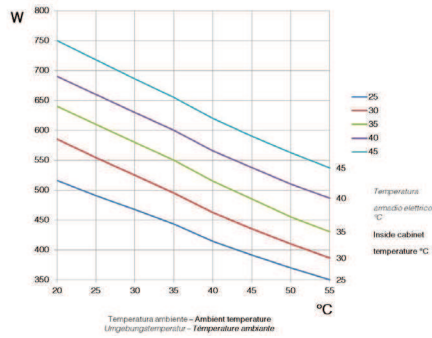


EVO SLIM 05

## Performance - Resa - Leistung - Rendimiento

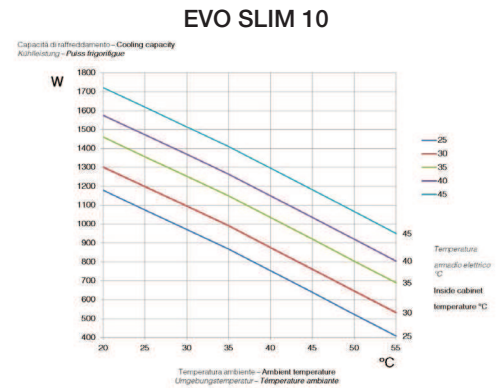

EVO SLIM 10

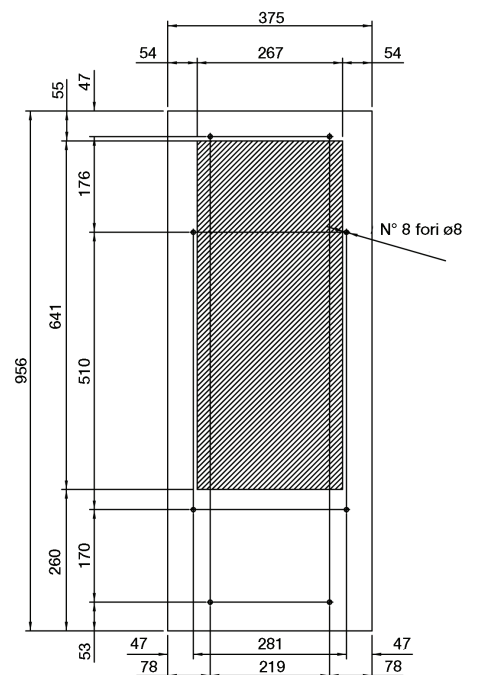

CODE - CODICE - MODEL - CODIGO	M.U.	EV005U12037000	EV005U12207000	EV010U12037000	EV010U12207000
Power supply - Alimentazione - Spannungsversorgung - Tensión	V / ph / Hz	115-1-60	230-1-60	115-1-60	230-1-60
Cooling capacity L35L35 - Potenza raffreddamento L35L35 Kälteleistung L35L35 - Potencia frigorífica L35L35 - DIN 3168	W	550	550	1150	1150
Cooling capacity L35L50 - Potenza raffreddamento L35L50 Kälteleistung L35L50 - Potencia frigorífica L35L50 - DIN 3168	W	450	450	800	800
Height / Widht / Depth - Altezza / Larghezza / Profondità Höhe / Breite / Tiefe - Altura / Ancho / Profundidad	mm	957x375x230*	957x375x230*	957x375x230*	957x375x230*
Max running current - corrente max, in marcha Max. Stromaufnahme - Corriente máxima, en marcha	A	7	3	7	5
Starting current - Corrente assorbita alla partenza Anlaufstrom - Corriente absorbida al arranque	A	15	6	30	13
Pre-Fuse T - Fusibile T - Absicherung T - Elemento previo de fusibile T	A	15	15	15	15
Power consumption L35L50 - Potenza assorbita L35L50 Leistungsaufnahme L35L50 - Potencia absorbida L35L50 - DIN3168	W	380	350	750	750
Side cabinet fan flow, free blowing - Portata aria ventil. lato armadio, bocca libera Luftmenge Schrankseite, freiblasend - Caudal. aire ventil. Lado armario	m <sup>3</sup> /h	330	330	330	330
Regulation Temperature limits - Limiti di regolazione Temperatura Temperatur Einstellbereich - limites de ajuste de Temperatura	°C	25 / 45	25 / 45	25 / 45	25 / 45
Side ambient Temperature limits - Limiti di Temperatura lato ambiente Umgebungstemperatur - Limites Temperatura lado ambiente	°C	-40 / +55	-40 / +55	-40 / +55	-40 / +55
Side cabinet protection degree - Protezione lato armadio Schutzgrad Schrankseite - Protección lado armario	IP / Type	54 / 4	54 / 4	54 / 4	54 / 4
Noise level - Rumorosità - Geräuschpegel - Nivel de ruido	dB(A)	58	58	58	58
Weight - Peso - Gewicht - Peso	kg	34,5	34,5	34	34

**OPTIONAL**

Special Colour - Colore Speciale  
Stainless steel cover Inox AISI304 - Copertura Inox AISI304

OCAVNS03  
OCAVISL10

\*senza pressacavo - without cable gland